


Item NO.	L/(MM)	T/(MM)
40-1998	500	10
40-1999	1000	10
40-2002	5000	100

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTENCE: 100%.
- 2.INSULATION RESISTANCE:DC300V 0.01S 5MΩ(MIN)
- 3.RoHS & REACH COMPLIANT

PIN OUT

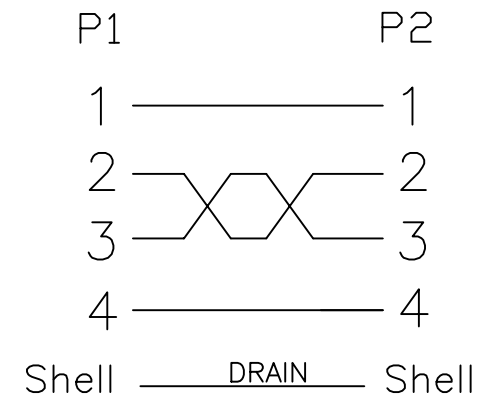

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
④	MOLDED	45P BEIGE PVC		G
③	CONNECTOR	USB2.0 A Female The Pin GOLD PLATED,WHITE INSULATION, NICKEL PLATED SHELL.	1	PCS
②	CONNECTOR	USB2.0 A Male The Pin GOLD PLATED,WHITE INSULATION, NICKEL PLATED SHELL.	1	PCS
①	CABLE	7/0.12BC*1P+7/0.12*BC+A+D+B(48/0.12AL-MG) + BEIGE PVC, OD:4.0±0.2mm	L	MM

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by ALVIN	Checked by HELEN	Approved by - date 07-04-2020	File name	Date 07-04-2020	Scale FREE
ANGLE:			USB2.0 Cable AM TO AF,BEIGE		
UNIT:MM			40-1998,40-1999,40-2002	Edition 1	Sheet 1/1