



RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

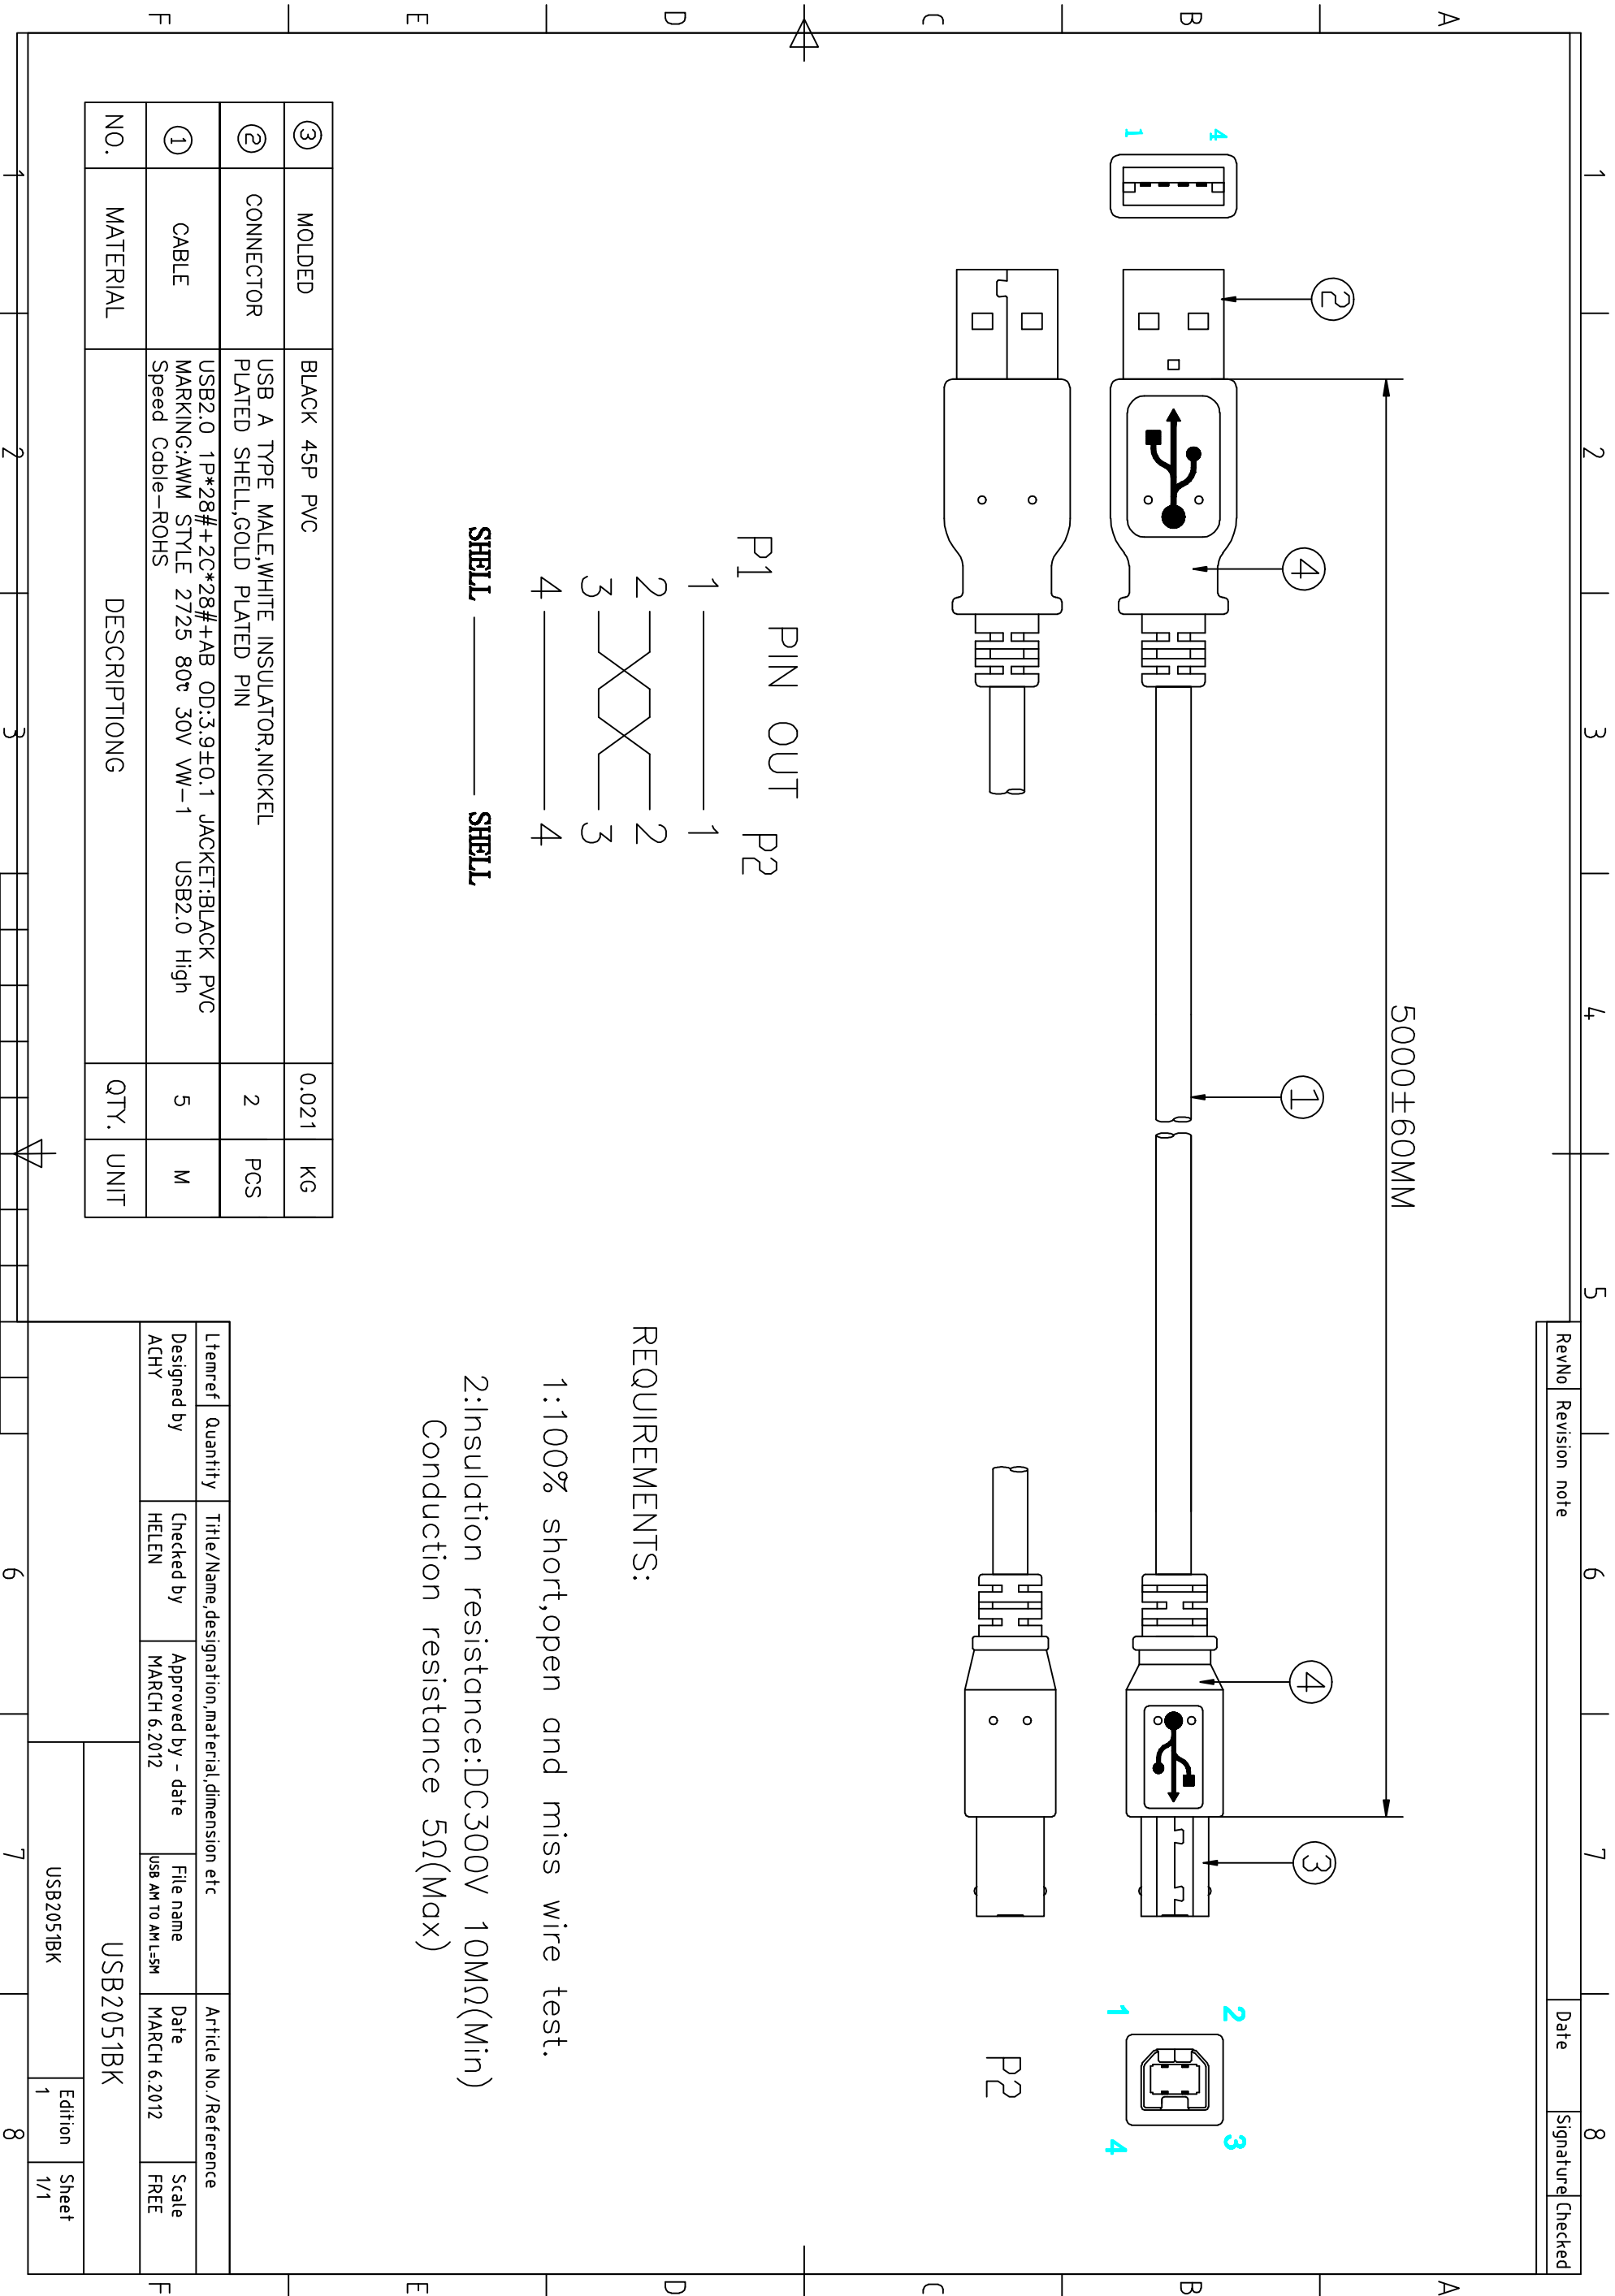

P1 PIN OUT P2

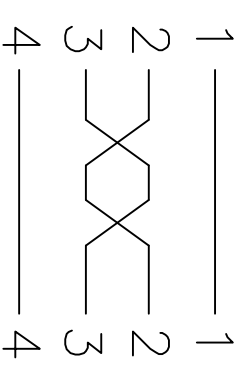

SHELL _____ SHELL

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
- Conduction resistance 5Ω(Max)

③	MOLDED	BLACK 45P PVC	0.021	KG
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80c 30V VW-1 USB2.0 High Speed Cable-ROHS	5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6,2012	File name usb AM TO AM L=5M
Date MARCH 6,2012			Scale FREE

USB2051BK		Edition	Sheet
		1	1/1