


量产图

发行章

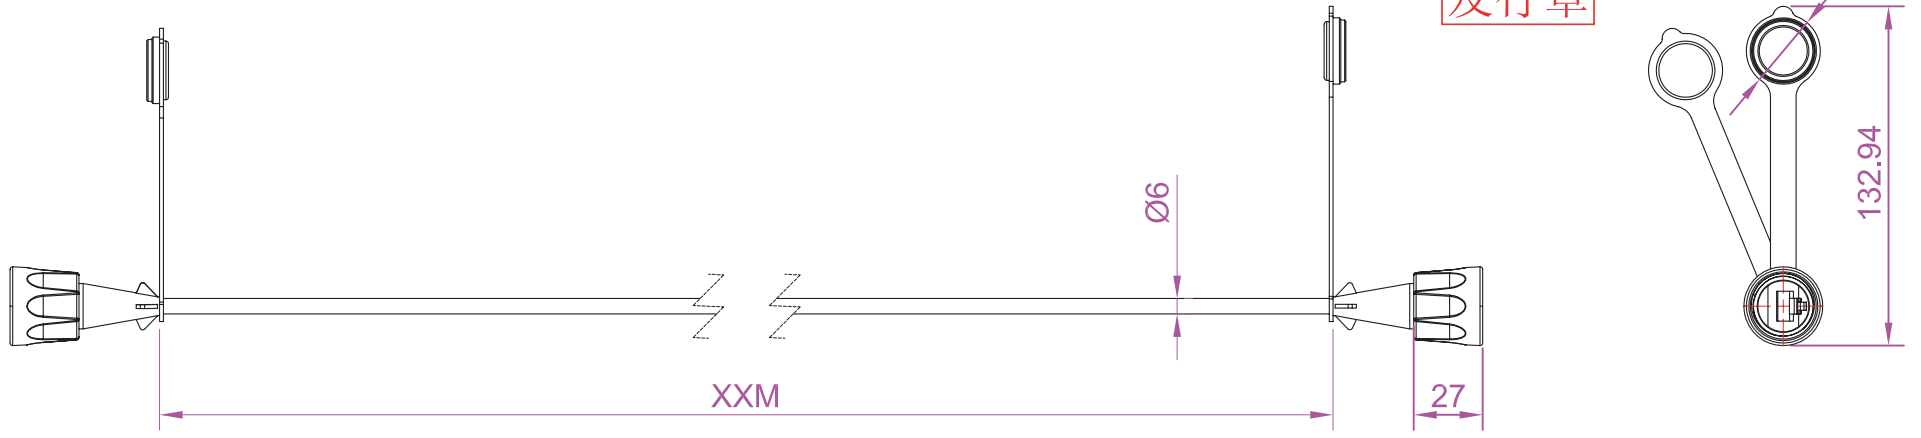


SPECIFICATION:

1. The material of cords is a kind of multicore cords and they meet the requirements stipulated in TIA/EIA-568-B about sixth category of patch cords.
2. Support 250 MHz broadband
3. Dielectric withstanding voltage: 1000V
4. Contact resistance: 2.5mΩ Max
5. Insulation resistance: 1000MΩ Min
6. Insertion life: 750 cycles Min

MATERIAL:

1. The housing of patch cords: PBT
2. Dustproof cap: PVC
3. PIN: PHOSPHOR BRONZE C5191

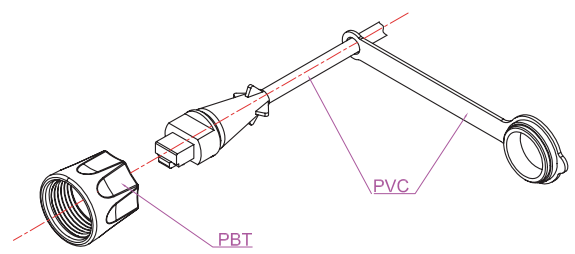

Scale		1:3			All Copy Rights Reserved			
3rd Angle Projection								
Unit		mm			Title			
Date		2013-01-04						
Tolerance					Drawn by		Checked by	
~20	~50	~150	150~	ANGLE				
±0.2	±0.4	±0.5	±1.5	±2°	LORNA HE			