



RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

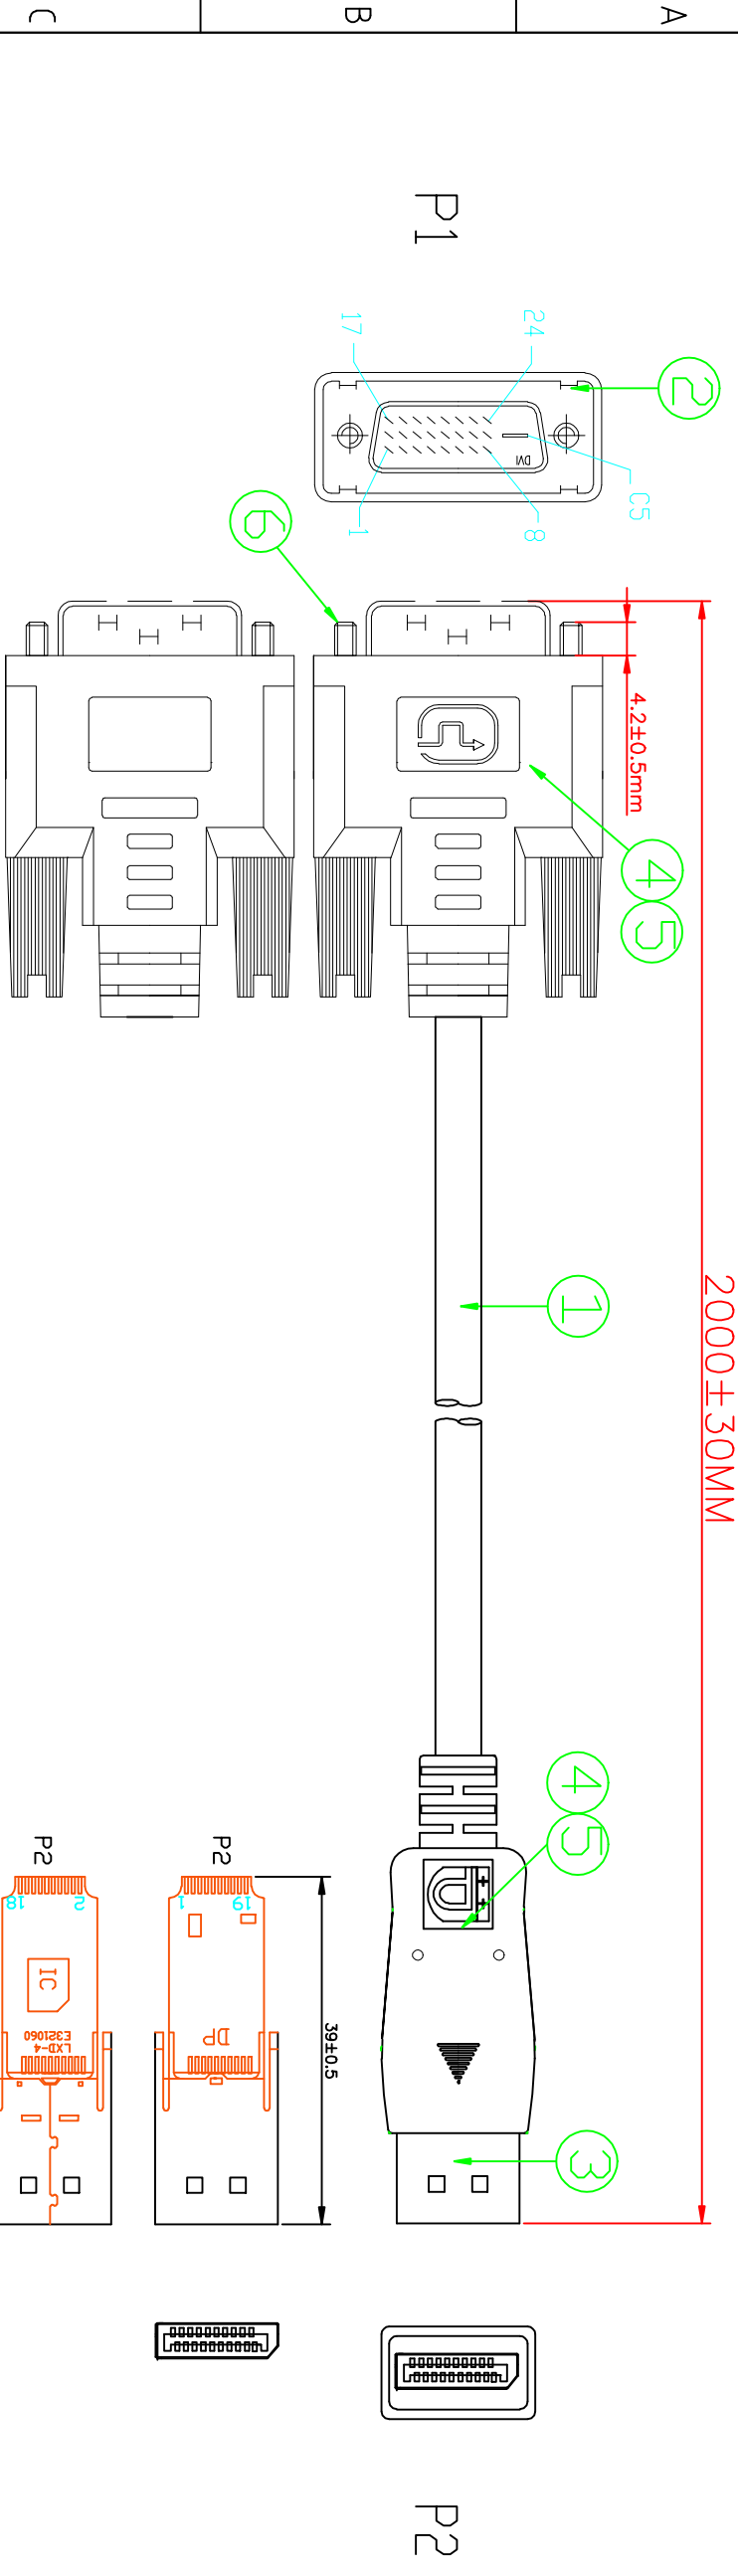

NOTES:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

⑥	SCREW	#4-40UNC SCREW,NICKEL PLATED,BLACK PVC	2	PCS
⑤	OUTER MOLDED	WHITE 45P PVC	0.078	KG
④	INNER MOLDED	LDPE	0.024	KG
③	CONNECTOR	DISPLAYPORT MALE WITH PCB BOARD,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	1	PCS
②	CONNECTOR	DVI 24+1 MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	1	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*4C+1P*30#++3C*30#++F+ADB JACKET:BLACK PVC,OD:7.3±0.2MM	2000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

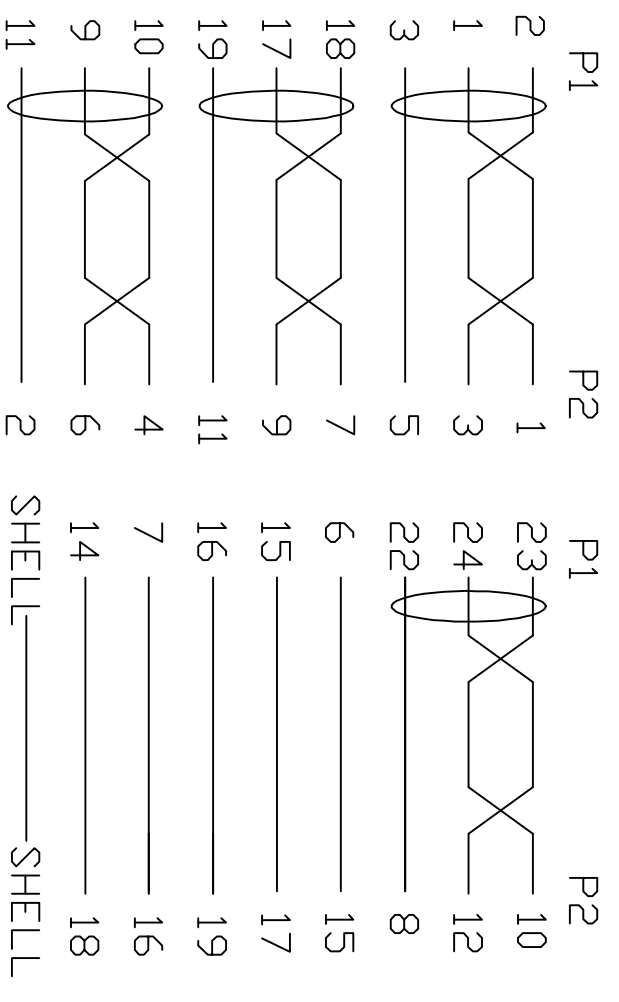

PIN OUT

Itemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date	Scale
ANGLE:	UNIT:MM	File name	FREE
		DVI 24+1/M-DP/M 28AWG	24 0206
		Edition	1
		Sheet	1/1