


PIN OUT

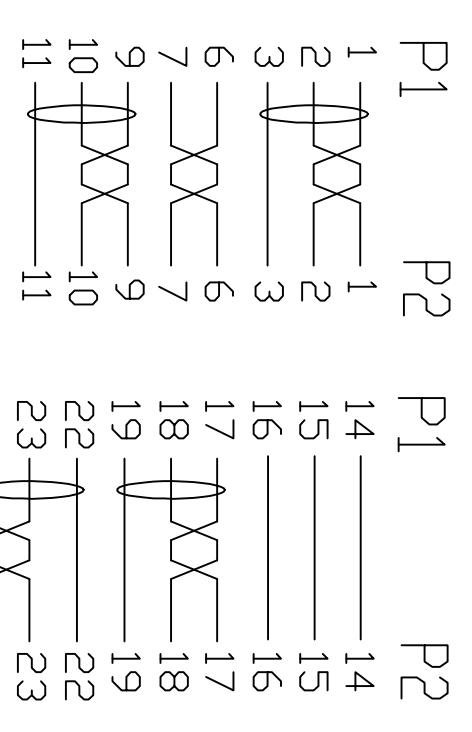

NOTES:  
 1: 100% short, open and miss wire test.  
 2: Insulation resistance: DC300V 10MΩ (Min)  
 Conduction resistance 5Ω (Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*4.5MM,NICKEL PLATED,WITH BLACK PVC	4	PCS
③	FERRITE CORE	F5B:RH12*20*7.3	2	PCS
②	CONNECTOR	DVI 18+1/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*28#+FME+D+AL+MYLAR)*4C+1P*28#+3C*28#+ADB JACKET:BLACK PVC OD:7.3±0.2MM	10000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference
Designed by	Checked by	HELEN	Approved by - date	File name
ACHY	HELEN	OCT 23,2014	DVI18+1 M/M 10M	Date
ANGLE:				OCT 23,2014
UNIT:MM				DVI 24+1 M-M 28AWG 10M
				32 2808
				Edition
				1
				Sheet
				1/1

