RevNo	Revision note	Date	Signature	Checked

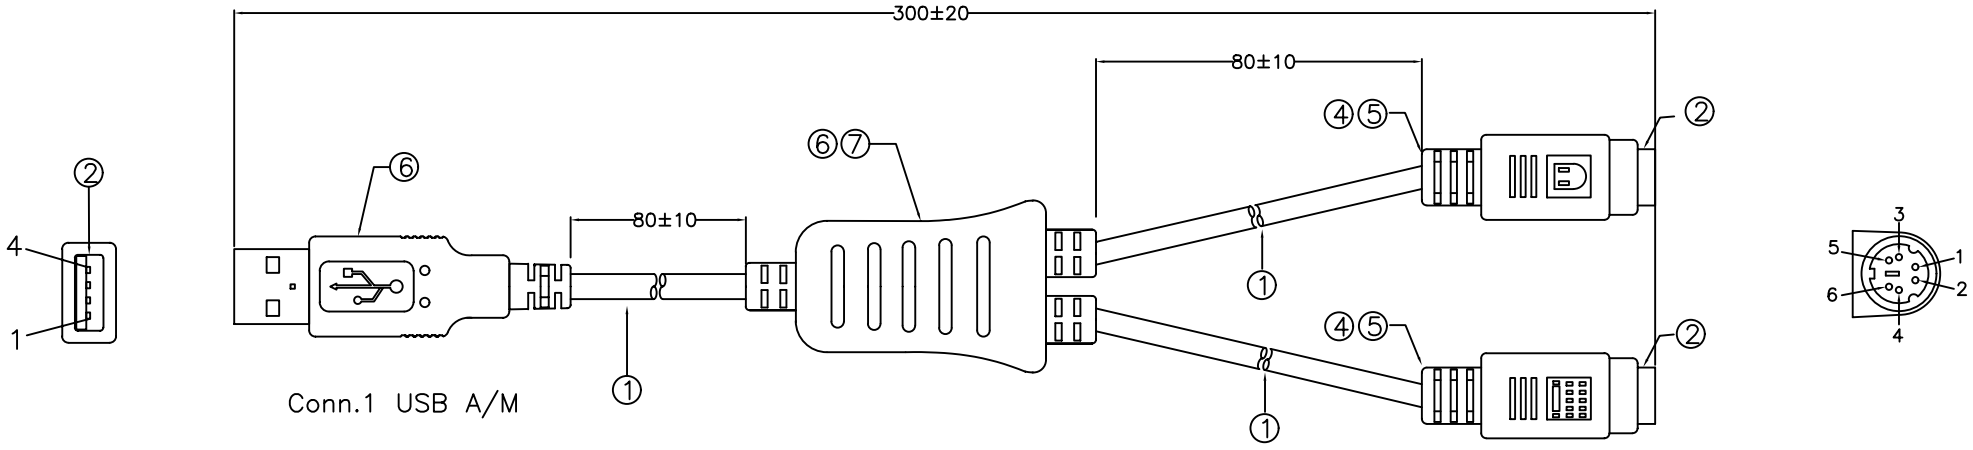

Item NO.	L/(MM)	T/(MM)
40-1030	300	20

Pin out

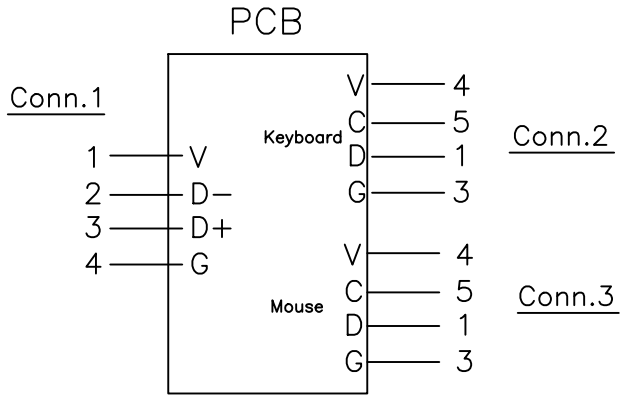

ELECTRONIC TEST:

1.OPEN/SHORT/INTERMITTENCE: 100%.
2.INSULATION RESISTANCE:DC300V 0.01S 5MΩ(MIN)
3.CONDUCTIVE RESISTANCE:5 OHM (MAX)
4.RoHS & REACH COMPLIANT

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑦	PCB	USB TO PS/2	1	PCS
⑥	MOLDED	45P BEIGE PVC		G
⑤	MOLDED	45P GREEN PVC		G
④	MOLDED	45P PURPLE PVC		G
③	CONNECTOR	MINI DIN 6P FEMALE,BLACK INSULATION,NICKEL PLATED SHELL.	2	PCS
②	CONNECTOR	USB2.0 A Male,WHITE INSULATION, NICKEL PLATED SHELL.	1	PCS
①	CABLE	28AWG*4C +BEIGE PVC,OD:4.5±0.2mm MARKING:USB SHIELDED HIGH SPEED CABLE 2.0 REVISION	L	MM

Itemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ALVIN		Checked by HELEN	Approved by - date 07-04-2020	File name	Date 07-04-2020	Scale FREE
ANGLE:				USB A (M) /2XPS2 (F), BLACK		
UNIT:MM				40-1030	Edition 1	Sheet 1/1