



RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

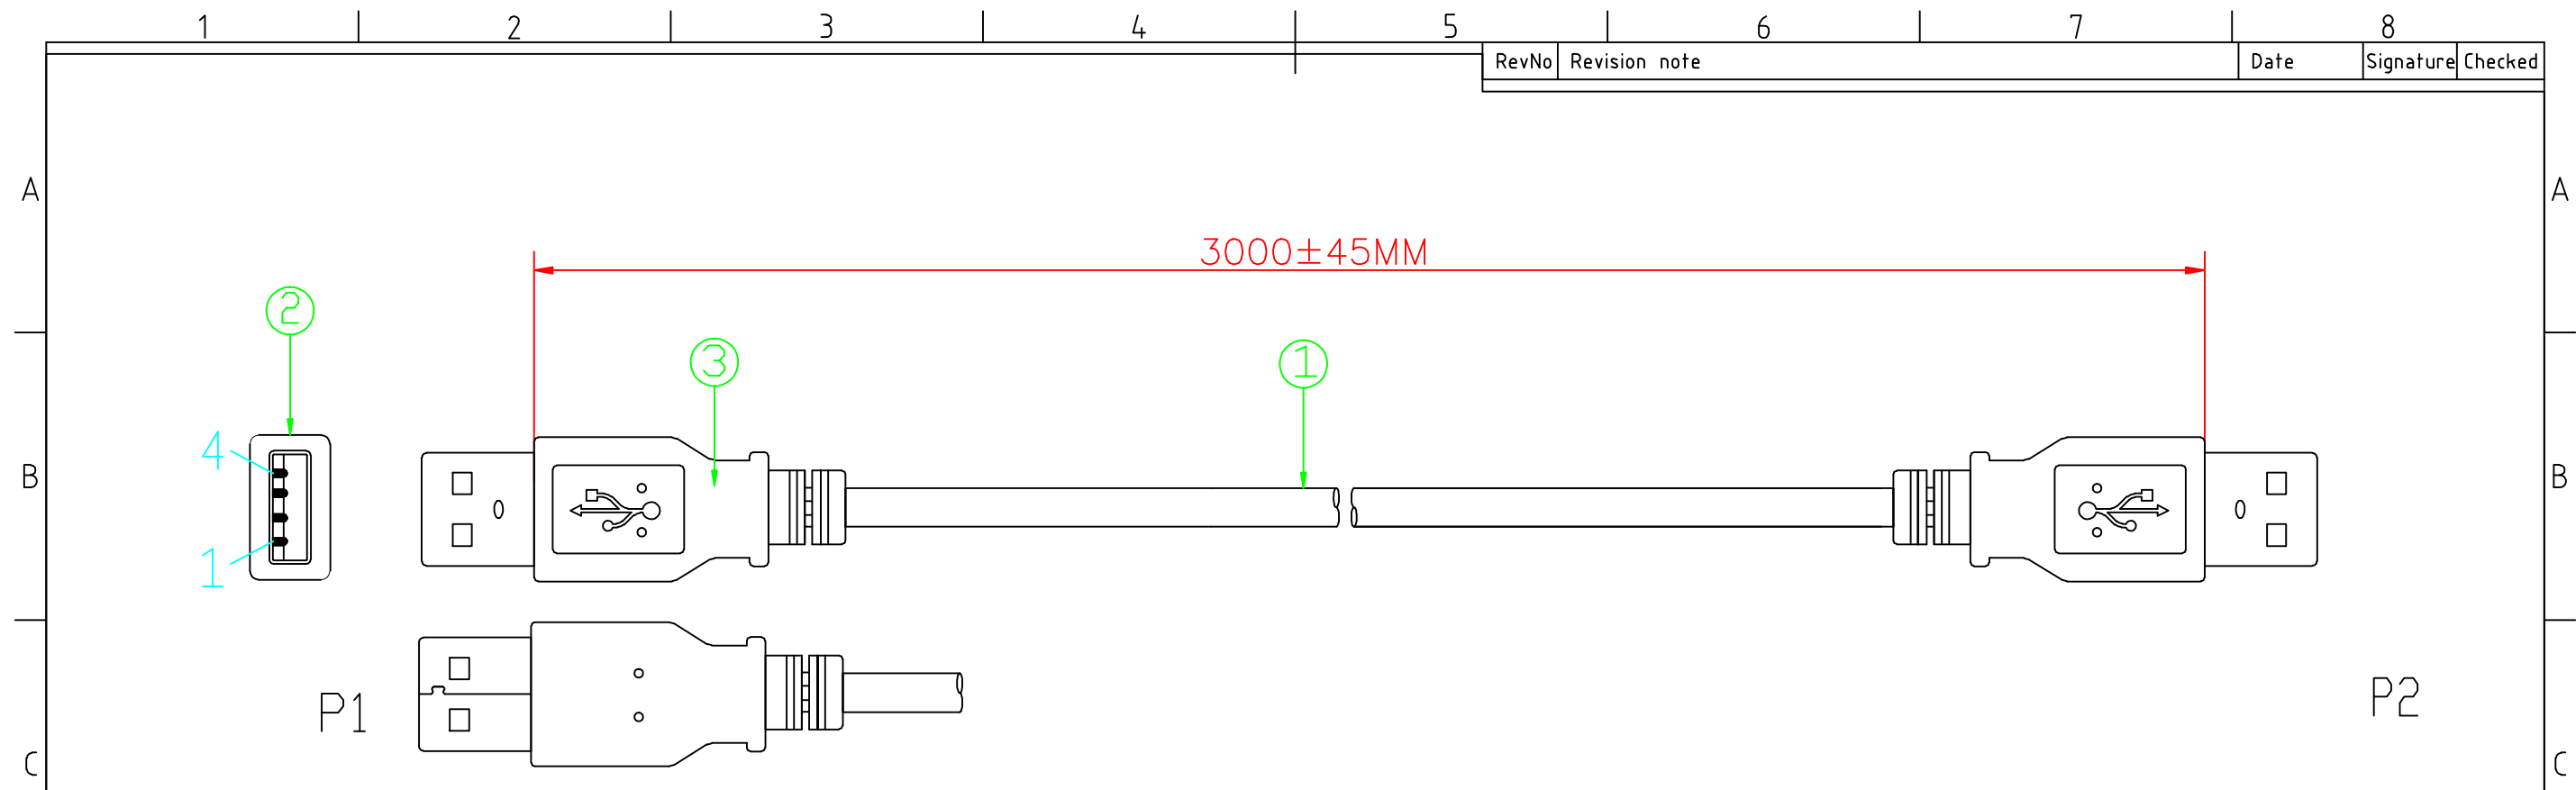

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

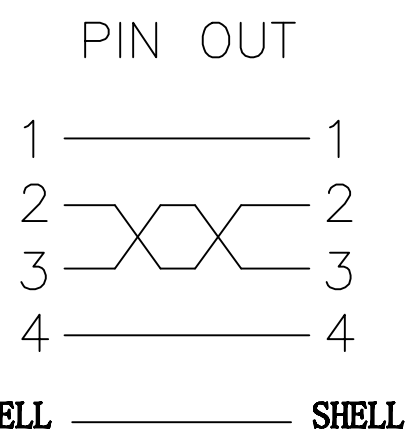

③	OUTER MOLDED	BEIGE 45P PVC	0.024	KG
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BEIGE PVC MARKING:AWM STYLE 2725 80℃ 30V VW-1 USB2.0 High Speed Cable-ROHS	3000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date JUN 03.2014	File name USB AM-AM 3M	Date JUN 03.2014	Scale FREE
ANGLE:		USB 2.0 AM-AM BEIGE 3M			
UNIT:MM		40 2052	Edition 1	Sheet 1/1	