




1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2019.02.20	A/0	NEW	XHX

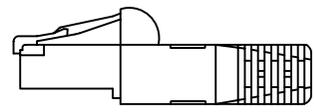


P1

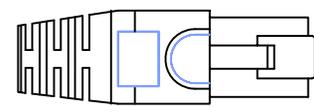

P2

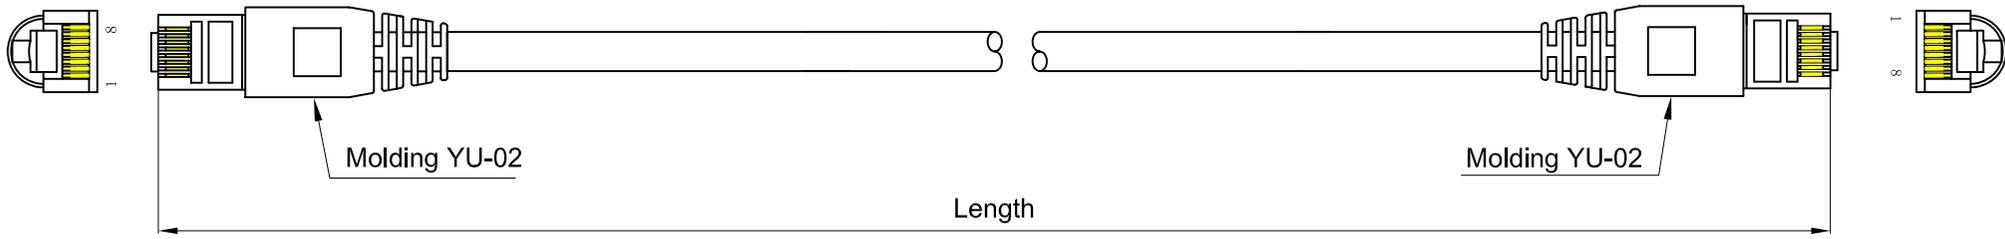

Marking: CAT.5E U/UTP INSTALLATION OUTDOOR CABLE 24AWG CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2

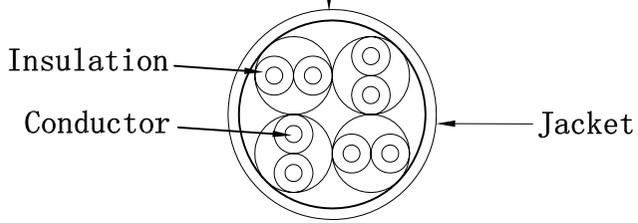

PINOUT			
PA/R	P1 (T568B)	WIRE	P2 (T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG
Insulation	Thickness:MIN at any point:0.1mm MAX AVG:0.196mm Diameter:0.926±0.06mm
Jacket	LDPE Thickness:MIN at any point:0.046mm MAX AVG:0.54mm Diameter:5.1±0.1mm
Wire	CAT.5E U/UTP 24AWG*4P
Plug	Gold flush YU-02
Colour	BK
Length	2000 <sup>+15mm</sup> <sub>-20mm</sub>

NOTE:  
1.ELECTRICAL TEST:  
<1> 100% OPEN SHORT & MISS WIRE TEST.

Part No.				
Description	CAT 5E U/UTP 24AWG*4P LDPE YU-02			
UNIT	mm	APPROVAL	CHECKER	DRAWER
PAGE	1/1	2019.02.20		XHX
Draw.No.		鐘曙光		